


GILLETTE GENERATORS

LEADER IN BRUSHLESS TECHNOLOGY

“EV” SERIES EMERGENCY VEHICLE COMPARTMENT STYLE GEN-SETS

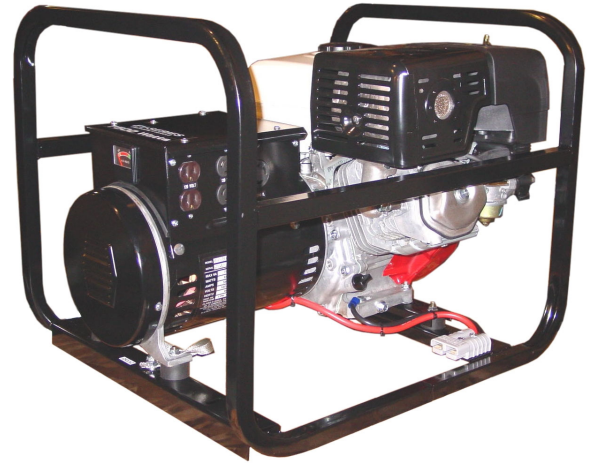

EV-75EH (Air Cooled Gasoline) is a portable electric start gen-set, intended for small compartments in emergency vehicles such as fire trucks, ambulances, & service trucks. These sets are mounted in a protective roll frame with pre-mounted vibration isolators and control panel wiring. Also, quick release devices on frame and battery cables, allow user to release the portable gen-set from compartment, pull the battery cables apart and use gen-set in remote applications by using rope-recoil starting method. All sets must use the vehicle 12 VDC battery for gen-set electric starting power. The gen-set is air-cooled so it must be mounted on a slide-out tray and brought into free cooling air before use.

SPECIFICATIONS (ALL LISTED ITEMS ARE STANDARD EQUIPMENT ON EACH GEN-SET.)	GASOLINE FUEL, SINGLE PHASE, 60 HERTZ, 120/240 VOLTS	
	EV-75EH (PORTABLE)	
MAXIMUM KILOWATTS	7.5	
PRIME KILOWATTS	6.5	
PRIME AMPS 120 /240 V.	54/27	
BRUSHLESS GEN./REG	5 % VOLTAGE REGULATION FROM NAME PLATE RATING ON ALL POWER-PRO GEN-SETS	
FREQUENCY REG	5% FREQUENCY REGULATION FROM NAMEPLATE RATING ON ALL “EV” SERIES SETS	
“KLEEN-POWER”™	WAVEFORM DISTORTION IS LIMITED TO JUST 7 % ON ALL “EV” GEN-SETS	
ENGINE BRAND AND HP AT 3600 RPM.	HONDA 13 HP	
ENGINE START	ELECTRIC AND ROPE RECOIL	
ENG. CU. CENTIMETERS	389	
LOW OIL SHUTDOWN	STANDARD ENGINE SHUTDOWN PROTECTION FOR ALL “EV” SERIES SETS	
FUEL USE, GAL./HOUR	.95	
FUEL TANK	1 1/2 GALLON METAL FUEL TANK	
CODE G ELECTRIC MOTOR START POWER IN HP RATING	2 1/2 HP	
RECEPTACLE PANEL COMPONENTS	(1) NEMA 5-15R, 120V., 15AMP DUPLEX (1) NEMA L5-15R, 120V., 15AMP TWIST-LOCK (1) NEMA L14-20R, 120/240 V. 20 AMP T.L. (5KW) (1) NEMA L14-30R, 120/240 V. 30 AMP T.L.(6-7.5KW) (2) MAIN CIRCUIT BREAKERS	
LENGTH, INCHES	26	
WIDTH, INCHES.	21	
HEIGHT, INCHES	19	
NET WEIGHT, LBS.	212	
SHIP WEIGHT, LBS.	229	