

INTRODUCING HALO (LEVEL II AND IIIA)

INNOVATIVE FEATURES


- Streamlined & efficient design
- Flexible build for all-day comfort
- Additional stopping power

Detailed specifications available upon request


SPECIAL THREATS

II

IIIA




FN 5.7, 5.7x28
SS197SR, 40 gr.
V-Max




FN Herstal 5.7x28,
SS197SR 40 gr.,
V-Max



.44 Rem. Mag., 240
gr. Hydra Shok
P44HS1, JHP



FN 5.7x28, 27 Gr.
SS195LF



M&P .357 Sig, Speer
LE .357 SIG 125 gr.
GDHP 54234



M&P 9mm, Speer LE
124 gr. GDHP 53617




M&P 9mm, Speer LE
124 gr. GDHP 53617



12 Gauge Belgium
Browning, 2 3/4" 1 oz.
FED. LE127 LRS



Certified to NIJ-0101.06 ballistic requirements

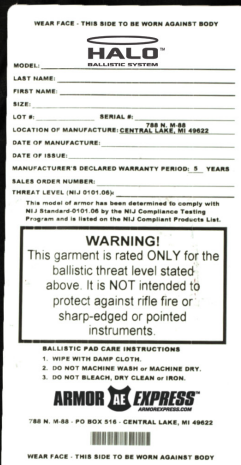

Industry Leading Performance - The flagship ballistic offering by Armor Express, the Halo package is a rare combination of strength, flexibility, and comfort.

Ground-breaking Protection - Designed in the lab, proven in the field, the Halo (level II and IIIA) is battle tested. Offering phenomenal protection against many special threat rounds in the field today - the Halo watches over those who put their lives on the line everyday.

HALO

LEVEL II

TECHNICAL SPECIFICATIONS

Model Designation	HLO-D-II
Certified to NIJ-0101.06 Threat Level	II
Test ID #	AEX09-001652
NIJ Certified Sizes	C1 - C5
Gender	Neutral
Ballistic Material	Twaron® Microfilament Flex Woven Aramid & Twaron® LFT
Pad Cover	Seam-sealed, waterproof Ripstop Nylon

Weight (Areal Density)	0.92 lbs/ft ²
Thickness	0.210 in
V-50 - 9mm	1,617 ft/s
V-50 - .357 Mag.	1,606 ft/s
Certification BFS - 9mm	34.4 mm
Certification BFS - .357 Mag.	37.50 mm
Warranty	5 Years

SPECIAL THREATS*

Threat	Shot Pattern	Avg. Measured Velocity	Number of Shots	Penetrations
FN 5.7, 5.7 x 28 SS197SR, 40 gr. V-Max	NIJ-0101.06	1,749 ft/s	6	0
.44 Rem. Mag., 240 gr. Hydra Shok P44HS1, JHP	NIJ-0101.06	1,293 ft/s	6	0
M&P .357 Sig, Speer LE .357 SIG 125 gr. GDHP 54234	NIJ-0101.06	1,398 ft/s	6	0
M&P 9mm, Speer LE 124 gr. GDHP 53617	NIJ-0101.06	1,235 ft/s	6	0

*Special threat testing conducted in Armor Express' state-of-the-art Ballistic Research Laboratory

HALO

LEVEL IIIA

TECHNICAL SPECIFICATIONS

Model Designation	HLO-B-III A
Cerified to NIJ-0101.06 Threat Level	IIIA
Test ID #	AEX09-001688
NIJ Certified Sizes	C2 - C5
Gender	Neutral
Ballistic Material	Twaron® Microfilament Flex Woven Aramid & Twaron® LFT and Twaron® Laminate
Pad Cover	Seam-sealed, waterproof Ripstop Nylon

Weight (Areal Density)	1.23 lbs/ft ²
Thickness	0.270 in
V-50 - .357 SIG	1,798 ft/s
V-50 - .44 Mag.	1,609 ft/s
Certification BFS - .357 SIG	29.8 mm
Certification BFS - .44 Mag.	38.9 mm
Warranty	5 Years

SPECIAL THREATS*

Threat	Shot Pattern	Avg. Measured Velocity	Number of Shots	Penetrations
FN Herstal 5.7x28, SS197SR 40 gr., V-Max	NIJ-0101.06	1,734 ft/s	6	0
FN 5.7x28, 27 Gr. SS195LF	NIJ-0101.06	1,980 ft/s	6	0
M&P 9mm, Speer LE 124 gr. GDHP 53617	NIJ-0101.06	1,217 ft/s	6	0
12 Gauge Belgium Browning, 2 3/4" 1 oz. FED. LE127 LRS	NIJ-0101.06	1,285 ft/s	6	0

*Special threat testing conducted in Armor Express' state-of-the-art Ballistic Research Laboratory