

Sizing

Sleeves: Measure from center back at neck base along shoulder and down arm to wrist with a slightly bent elbow.

Inseam: Measure from base of crotch down inside of leg to desired pant length.

Classic Brush Interface Pants: Please choose one option from both waist (step 1) and inseam (step 2) for the appropriate fit.			
Step 1: Waist		Step 2: Inseam	
Small	27" - 30"	Short	28"
Medium	31" - 34"	Regular	30"
Large	35" - 38"	Long	32"
X-Large	39" - 42"	X-Long	34"
XX-Large	43" - 46"	XX-Long	36"
XXX-Large	47" - 50"	XXX-Long	38"

Elite Gen II Uniform Pants: Please choose one option from both waist (step 1) and inseam (step 2) for the appropriate fit.	
Step 1: Waist	Step 2: Inseam
28"	28"
30"	30"
32"	32"
34"	34"
36"	36"
38"	38"
40"	
42"	
44"	
46"	
48"	

Shirts Coats: Please choose one option from both chest (step 1) and sleeve (step 2) for the appropriate fit.		
Size	Step 1: Chest	Step 2: Sleeve
Small	34" - 36"	32"
Medium	38" - 40"	33"
Large	42" - 44"	34"
X-Large	46" - 48"	35"
XX-Large	50" - 52"	36"
XXX-Large	54" - 56"	37"

Jumpsuits: Please choose one option from both chest (step 1) and height (step 2) for the appropriate fit.			
Step 1: Chest		Step 2: Height	
Small	34" - 36"	Short	5'4" - 5'7"
Medium	38" - 40"	Regular	5'8" - 6'0"
Large	42" - 44"	Tall	6'1" - 6'4"
X-Large	46" - 48"		
XX-Large	50" - 52"		
XXX-Large	54" - 56"		

Care Instructions

To insure that you get the maximum performance out of your CrewBoss garment, please follow these simple steps for garment care.

Washing

Regardless of the type of fabric, any CrewBoss protective garment should be machine washed in warm but not hot water. This will help against damage to reflective trim and lettering.

Drying

CrewBoss garments will perform at their best when dried in the tumble low setting. Although some fibers are less likely to shrink than others, this helps reduce the risk of potential shrinkage to the garment.


Special Care Instructions

Do not use bleach.

Do not use any fabric softeners.

Keep out of prolonged exposure to direct sunlight.

Dry cleaning is not recommended as the process may damage reflective trim.

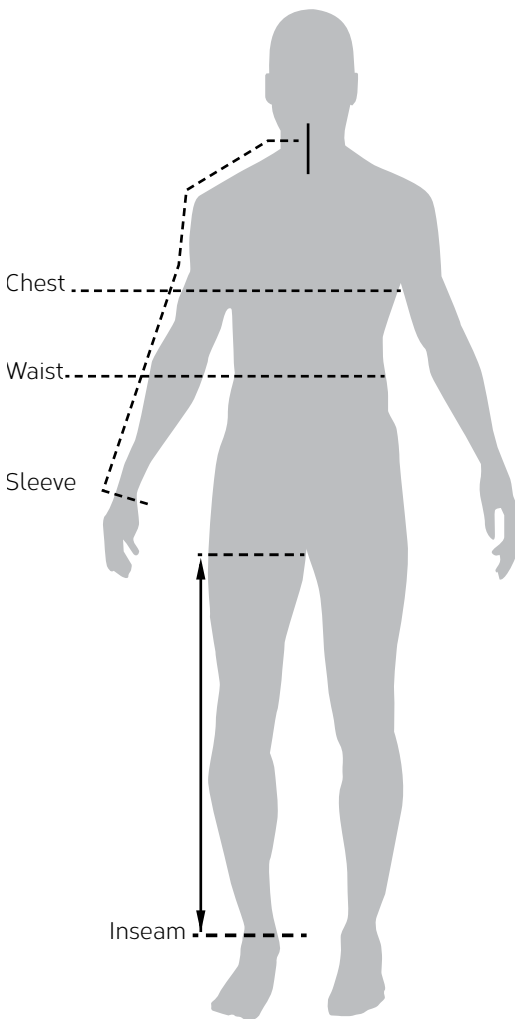

Conditional Warranty

CrewBoss warrants all products against defects in materials or workmanship for a period of one year from date of manufacture. Component manufacturer's warranty may exceed that of CrewBoss. No warranty is made or implied regarding the intended use of the product. Warranty does not cover damage caused by abuse, misuse, neglect or improper care by the end user in the application of the CrewBoss product. CrewBoss will repair or replace any component deemed to be faulty from manufacture in the most efficient and timely means available to CrewBoss. CrewBoss must authorize all claims prior to any action taken by the end user. For immediate attention regarding any defective product, please phone Customer Support at 1-800-971-7201, 7am-3:30pm, Pacific Time.